Filter Conveyor Belt



Features

Rubber filter belt, also called vacuum belt or carrier belt, is designed for solid-liquid separation. It is the critical part of rubber belt vacuum filter and vacuum belt stock washer.

Cover Grade: Heat resistant, Acid & Alkali Resistant, Oil resistant, Cold Resistant, Abrasion & Acid Resistant.


Belt width: max. 6800mm

Construction

Displacement Tank Framing Capped Edge Framing

Structure Diagram

Cross Section of Groove

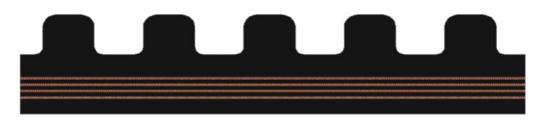

Planar Graph of Filter Belt

-		- A.	-	
111	÷		÷	
111	÷	÷	÷	
1111	÷	÷	÷	
WW	÷		÷	
A A A	÷	÷	÷	

1000 March	
-	
-	-
10 Million and 10 Million	
-	
-	
-	
	the subscription of the local division of th
1000	
-	

Thickness



Sidewall Bond Way:

- a. Cold bonding: It's easy to operate in local workshop, and convenient for transportation.
- b. Hot vulcanizing: Has longer lifetime, need be very careful in transportation.

Filter Press Fabrics (Filter Press Cloths):

- **Material:** Polyester monofilament.
- * **Composition:** 100% Polyester.
- W Use: Filter press fabrics used for filter and filter press, paper mills dryer and conveying.
- Application: It's widely used in sludge desiccation, paper pulp washing, coal washing, chemicals, dehydration of wine bran, vinegar bran dehydration and other industries.

