


DOUBLE SEAL SKIRTING

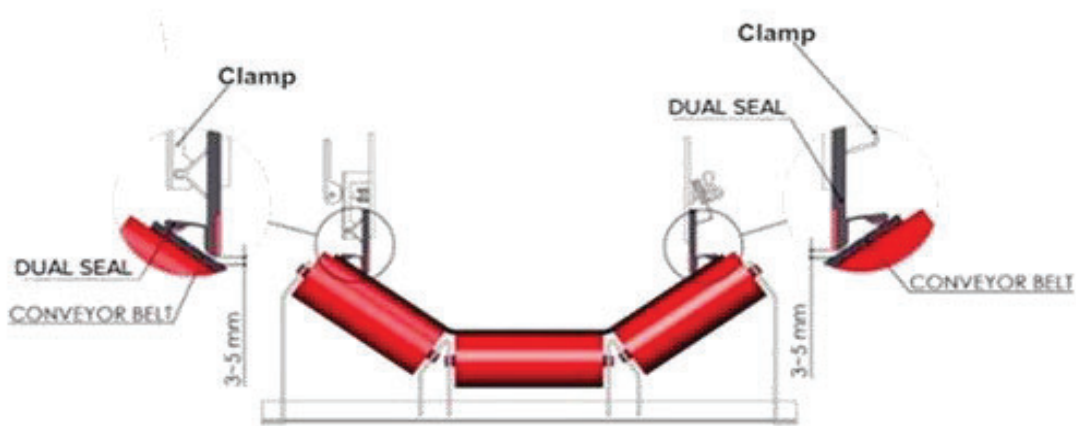

Features

Dual Seal Skirting is a two-layer sealing strip system that includes a primary and secondary seal. The primary seal contains bulk material at the transfer point, while the outer secondary seal provides a floating contact area behind the primary slab to manage dust control. This skirting system effectively prevents material spillage and controls dust emissions in any load zone.

Product Parameters

Item	RP70	PU60	EPDM70	EPDM65
Material	NR/SBR Rubber Polyurethane	Polyurethane	EPDM Rubber	EPDM Rubber
Color	▲ ▲	▲	▲	▲
Hardness	Rubber 70±5 ShA PU 85±5 ShA	60±5 ShA	70±5 ShA	65±5 ShA
Tensile Strength	Rubber 8 MPa PU 35 MPa	40 MPa	8 MPa	8 MPa
Elongation @break	Rubber 350% PU 400%	660%	300%	300%
Abrasion Loss	PU 60 mm ³	40 mm ³	-	-
Height	130 / 150 / 180 / 190 / 200 / 250 mm	150 / 190 mm	108 / 150 / 178 / 200 mm	108 / 150 / 178 / 200 mm
Image				

POLYURETHANE SKIRTING



Features

Polyurethane Skirting is designed for use as a sealing skirt along the conveyor belt on conveyor systems.

Material: POLYURETHANE

Advantage:

Excellent cut and tear strength, abrasion resistance, water & oil & grease resistance, cost effectiveness.

Product Range

- ※ **Width:** 100mm, 150mm, 200mm, 250mm, 300mm, 350mm, 400mm, 450mm, etc.
- ※ **Thickness:** 8mm, 10mm, 12mm, 16mm, 19mm, 20mm, etc.
- ※ **Color:** Red, Orange, Green, Black, etc.

Main Technical Data

Density	Hardness	Tensile Strength	Elongation at Break	Tear Strength	Temperature Range
1.25 g/cm ³	70±5 Shore A	40MPa	≥650%	20 N/mm	-20°C ~ + 70°C
1.25 g/cm ³	90±5 Shore A	45MPa	≥600%	40 N/mm	-20°C ~ + 70°C

NATURAL RUBBER SKIRTING

Features

Natural rubber skirting is a versatile and durable solution for a wide range of corrosion and wear protection applications. It is used effectively as sand and shot blast curtain material because of its high abrasion resistance and resilience.

Material: Natural Rubber

Advantage:

- ※ Excellent resilience & tear strength
- ※ High wear and abrasion resistance



Product Range

- ※ **Width:** 100mm, 150mm, 200mm, 250mm, 300mm, 350mm, 400mm, 450mm, etc.
- ※ **Thickness:** 8mm, 10mm, 12mm, 16mm, 19mm, 20mm, etc.
- ※ **Color:** Red, Orange, Green, Black, etc.

Main Technical Data

Hardness (Shore A)	Specific gravity (g/cm ³)	Tensile strength (MPa)	Elongation at break (%)	Temperature Range (°C)	Abrasion Loss (mm ³)
35	1.05	20	750	-25~+80	80
40	1.05	16	600	-25~+80	80
40	1.05	20	600	-25~+80	80
40	1.05	22	600	-25~+80	80
40	1.12	19	600	-25~+80	130
45	1.05	20	650	-25~+80	80
45	1.1	15	600	-25~+80	120
50	1.2	16	600	-25~+80	120
55	1.25	16	600	-25~+80	120